

# imole





## **LUMINAIRE DESCRIPTION**

Imole is a custom-made luminaire suitable for installation in cast concrete, in insulation panels, in plasterboard and in variety of construction material.


It is composed of two elements, the housing (galvanize or inox) and the kit (made of die cast aluminum) which remains completely hidden. It can be produced in variety of lengths and heights. It can be painted in any color and its front finish can be covered in any material (stone, ceramic, etc.).

The opening of the light slit depends on the wattage of the LED, the type of ballast and the thickness of the material chosen to cover the front finish.

## **LUMINAIRE IMAGE**





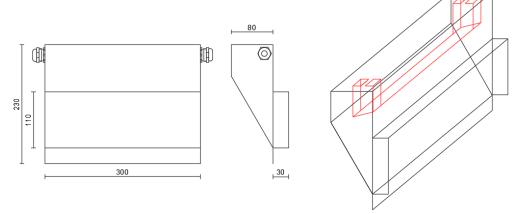

apleton Papagiannopoulos Bros | 20, Kapodistriou Str. 14671 Nea Erithrea Athens, Greece T: +30 2108000567, +30 2106200817 | E: papag@apleton.com.gr | apleton.com.gr



## **LUMINAIRE INFORMATION**

Product Name: imole

Code: -

Environment Application: outdoor

Driver: external / internal

# **LUMINAIRE DETAILS**

# **APPLICATION DETAILS**

Fitting Type: wall recessed wall recessed

Housing Color: upon request RAL:1015 – light ivory

Housing Material: galvanize or inox inox

Dimensions: upon request W 300mm / H 230mm

Voltage: 230V 230V Wattage: upon request 10W IP Rating: 65 or more 65

Accessories: kit with mounted driver kit with mounted driver

# LIGHT SOURCE

Type: LED
Wattage: upon request
10W
Luminous Flux: upon request
780 Im
Color Temperature: upon request
2700K

## **DRIVER DETAILS**

Driver Voltage Input: 230V

Driver Voltage Output: upon request

Driver Wattage: upon request

Dimming Protocol: upon request

on-off



