

Part number Codice prodotto	V in DC	P out W @12Vdc	P out W @24Vdc	I out DC max	Efficiency	ta °C	tc °C
A40DALI1103B	12÷24	144	288	12 A	98%	-10...+40	70

## Features

- IP20 independent interface
- Can be controlled by low voltage 24Vdc or 230Vac 50Hz push button
- Supplied with terminal cover and cable retainer

## Caratteristiche

- Interfaccia indipendente IP20
- Controllabile tramite pulsante a bassa tensione 24Vdc o pulsante a 230Vac 50Hz
- Fornito di coprimorsetto e serracavo

## Other technical data / Altri dati tecnici

Rated Voltage / Tensione nominale:	12 - 24 Vdc
Nominal life-time / Durata di vita nominale:	50000h @Ta 40 °C
Light control / Controllo della luce:	DALI/ PUSH BUTTON / 0-10V / 1-10V or 47K Potentiometer
Primary side terminal block / Morsetto lato primario:	1 x 0,5...2,5 mm <sup>2</sup>
Primary side strain relief for cables / Serracavo lato primario:	Ø 4...9 mm <sup>2</sup>
Secondary side terminal block / Morsetto lato secondario:	1 x 0,5...2,5 mm <sup>2</sup>
Secondary side strain relief for cables / Serracavo lato secondario:	Ø 4...9 mm <sup>2</sup>

**Directives / Direttive:** 2014/35/EU (LVD); 2014/30/EU (EMC); RoHS 2011/65/EU + 2015/863/EU (RoHS)


**Standards compliance:** EN 61347-2-13:2014 + A1:2017; EN 61347-1:2015

**Conformità alle norme:** EN 55015:2019 + A11:2020


EN IEC 63000:2018

IEC 62386-102:2014 + AMD1:2018; IEC 62386-207:2018

## Operating mode selection / Selezione modalità operativa

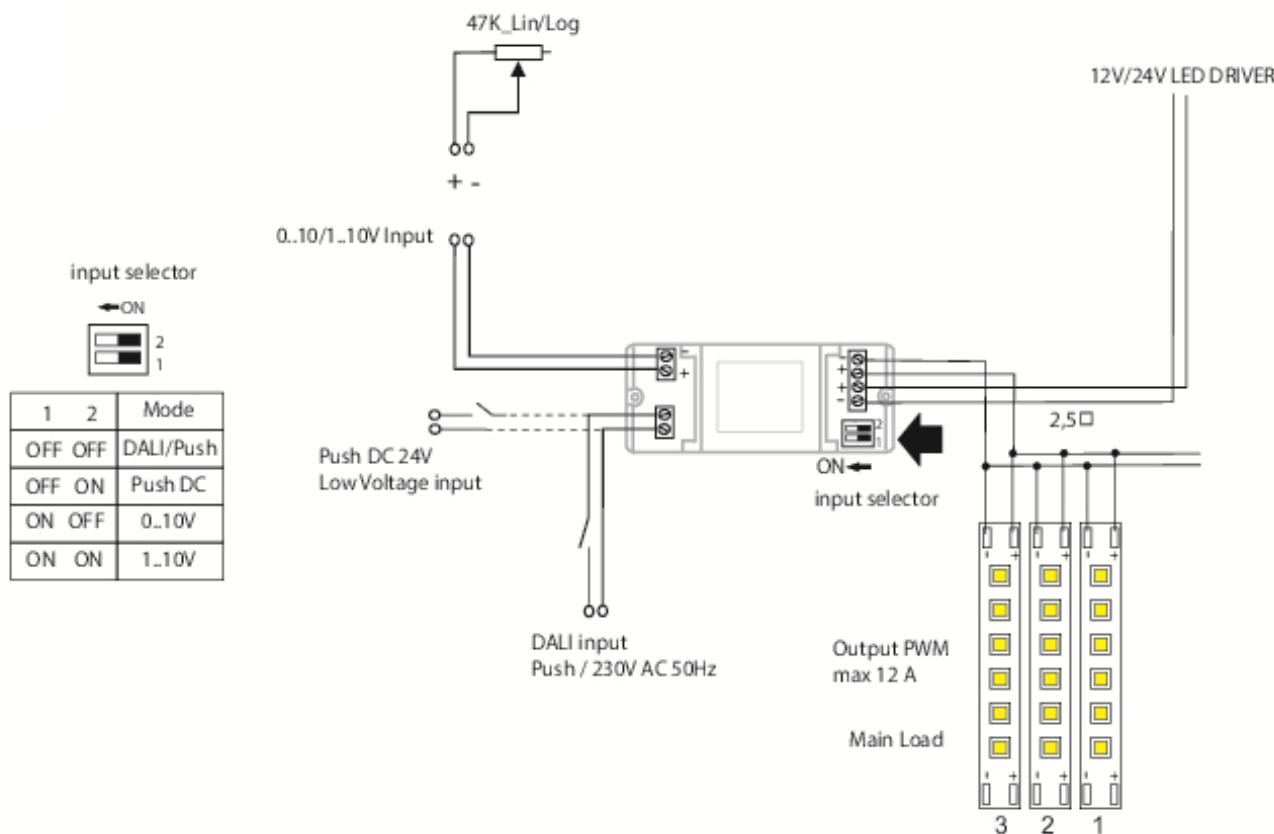

## Dimensions / Dimensioni

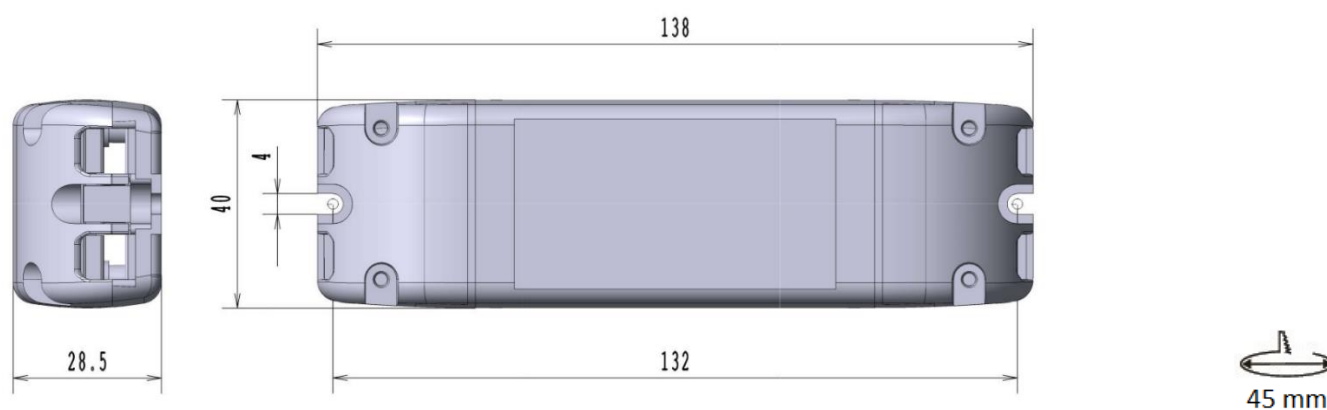

## Weight / piece – Peso / pezzo

A40DALI1103B	95 gr.
--------------	--------