


Sylproof Tubular LED - DALI

Sylproof Tubular LED 2X1200 DALI NW
0047602



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

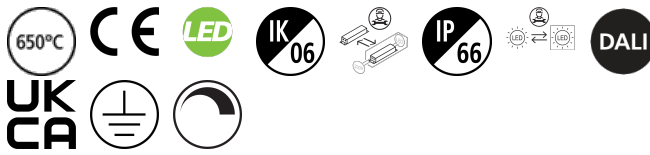

PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1200 DALI NW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	4264
Luminous flux (lm)	4264
Luminaire efficacy (lm/W)	109.33
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476025
Dimming method	DALI


PHOTOMETRY

Sylproof Tubular LED - DALI Sylproof Tubular LED 2X1200 DALI NW 0047602

Distance [m]	Cone diameter [m]	E0°	E10°	E30°	E45°	E60°	E75°	E90°	Ilum. [lx]
0.5	1.19 2.23	4834	1209	461	255	161	102	71	19
1.0	2.38 4.45	1209	302	107	61	39	25	18	8
1.5	3.58 6.68	483	102	36	20	13	8	6	3
2.0	4.77 8.90	302	61	20	11	7	5	4	2
2.5	5.96 11.13	191	39	13	7	4	3	2	1
3.0	7.15 13.35	154	31	10	6	3	2	1	1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 135.0°)
— C90 - C270 (Half beam angle: 100.0°)



TECHNICAL DRAWINGS

