

Concord
by **SYLVANIA**



High performance office lighting

Concord OfficeLyte



The design of Concord OfficeLyte is perfect for office, education and meeting rooms, with a lumen output up to 4350lm and efficiency up to 141lm/W.

Visual comfort is an important factor when deciding upon your lighting scheme and our range conforms to EN12464-1 for indoor workplaces and all models are UGR<19 compliant almost eliminating glare within the office environment.

Officelyte is also highly efficient with certain models featuring SylSmart Standalone and Connected technology.

For more information on Officelyte LED please contact your local account manager who will be pleased to help.

The beauty of **light**

Concord OfficeLyte LED



Features

- Efficient LED modular luminaire incorporating cutting edge chip technology
- High Efficiency and High Output solutions providing the optimum energy efficient lighting schemes depending on ceiling heights and required spacings
- Introduces uniform light distribution greatly enhancing the lit space
- High efficiency up to 141lm/W
- High lumen output up to 4,350lm
- Low glare ratio conforming to EN 12464-1
- UGR < 19 on all versions
- DALi dimmable options, together with SylSmart Standalone for smaller applications and SylSmart Connected for building wide connectivity

Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control technology	UGR
OfficeLyte 600x600mm - High Efficiency									
3000K (warm white)									
2069000	OfficeLyte 600 HE 3K	24	3250	135	3000	>80	-	-	<19
2069241	OfficeLyte 600 HE 3K DALI	24	3250	135	3000	>80	Yes	DALI	<19
2069310	OfficeLyte 600 HE 3K SSA02	25	3250	130	3000	>80	Yes	SylSmart Connected	<19
4000K									
2069243	OfficeLyte 600 HE 4K	24	3375	141	4000	>80	-	-	<19
2069246	OfficeLyte 600 HE 4K EM	27	3375	125	4000	>80	-	-	<19
2069244	OfficeLyte 600 HE 4K DALI	24	3375	141	4000	>80	Yes	DALI	<19
2069245	OfficeLyte 600 HE 4K DALI EMPR	27	3375	125	4000	>80	Yes	DALI	<19
2069270	OfficeLyte 600 HE 4K SSC	25	3375	135	4000	>80	Yes	SylSmart Standalone	<19
2069312	OfficeLyte 600 HE 4K SSA02	25	3375	135	4000	>80	Yes	SylSmart Connected	<19
OfficeLyte 600x600mm - High Output									
3000K (warm white)									
2069252	OfficeLyte 600 HO 3K	32	4200	131	3000	>80	-	-	<19
2069253	OfficeLyte 600 HO 3K DALI	32	4200	131	3000	>80	Yes	DALI	<19
2069311	OfficeLyte 600 HO 3K SSA02	32	4200	131	3000	>80	Yes	SylSmart Connected	<19
4000K (neutral white)									
2069255	OfficeLyte 600 HO 4K	32	4350	136	4000	>80	-	-	<19
2069258	OfficeLyte 600 HO 4K EM	35	4350	124	4000	>80	-	-	<19
2069256	OfficeLyte 600 HO 4K DALI	32	4350	136	4000	>80	Yes	DALI	<19
2069257	OfficeLyte 600 HO 4K DALI EMPR	35	4350	124	4000	>80	Yes	DALI	<19
2069272	OfficeLyte 600 HO 4K SSC	33	4350	132	4000	>80	Yes	SylSmart Standalone	<19
2069313	OfficeLyte 600 HO 4K SSA02	32	4350	136	4000	>80	Yes	SylSmart Connected	<19

Accessories


Code	Description
2069281	Lumafix Pull-Up Accessory
2047754	Lumafix Pull-Up Accessory Kit



Additional Image




Photometric Data

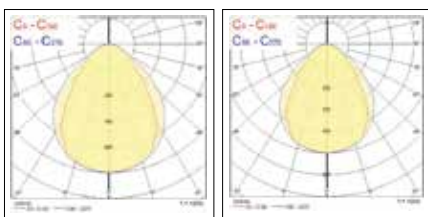

High Efficiency

High Output

Dimensions (mm)

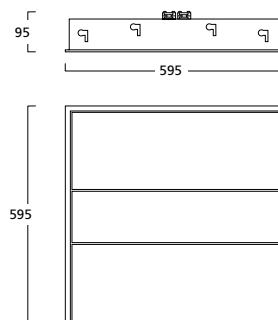

Concord OfficeLyte Linear LED



Features

- 1200x300mm version of Officelyte family
- High efficiency up to 144lm/W
- Lumen output up to 3,450lm
- Low glare ratio conforming to EN 12464-1
- UGR < 19
- Variant versions available upon request to conform to SAS ceiling requirements
- DALI dimmable control as standard, SylSmart Standalone and SylSmart Connected control options

Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	CRI	Dimmable	Control technology	UGR
OfficeLyte 1200x300mm - High Efficiency									
3000K (warm white)									
2069264	OfficeLyte 1200 HE 3K DALI	24	3350	140	3000	>80	Yes	DALI	<19
2069314	OfficeLyte 1200 HE 3K SSA02	25	3350	134	3000	>80	Yes	SylSmart Connected	<19
4000K (neutral white)									
2069266	OfficeLyte 1200 HE 4K DALI	24	3450	144	4000	>80	Yes	DALI	<19
2069267	OfficeLyte 1200 HE 4K DAL EMPR	27	3450	128	4000	>80	Yes	DALI	<19
2069271	OfficeLyte 1200 HE 4K SSC	25	3450	138	4000	>80	Yes	SylSmart Standalone	<19
2069315	OfficeLyte 1200 HE 4K SSA02	25	3450	138	4000	>80	Yes	SylSmart Connected	<19

SAS 330 versions with and without gaskets or other ceiling grid types are available upon request
Air Handling version are available upon request

Accessories


Code	Description
2069281	Lumafix Pull-Up Accessory




Additional Image



Dimensions (mm)

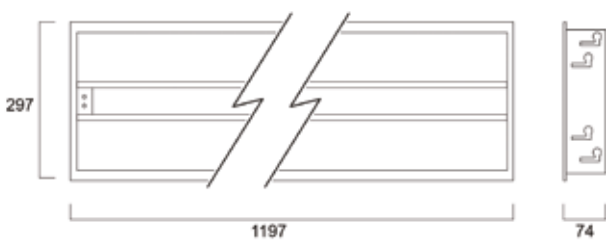

Photometric Data



OfficeLyte Linear HE - 4000K



Concord

by **SYLVANIA**



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. February 2022

sylvania-lighting.com

A Feilo Sylvania Company