



Panels for all applications

START Panel


START Panel family is a range of recessed LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. They can be also installed surface mounted and suspended with the available accessories.

This range includes Standard, High Efficacy, UGR19, IP44, IP65, CRI90, DALI, SylSmart Connected and SylSmart Standalone enabled luminaires in different sizes: 600x600mm, 625x625mm, 1200x300mm and 1200x600mm.

SylSmart Standalone is a wireless, plug and play lighting control solution which delivers maximum control and minimum installation for smaller applications. SylSmart Connected system provides a ready-to-go, open standard, luminaire integrated control system for floor-wide and building-wide use.

The optical design ensures a consistent uniform output throughout the luminaire creating a comforting, and soft light source.

START Panel UGR19



Features


- The range includes 600x600mm, 625x625mm, 1200x300mm and 1200x600mm modules to meet the most common installation needs
- Microprismatic diffuser for low glare and low UGR 19 value
- Slim size of 25 or 35mm maximum total height - with driver 55 or 65mm
- Standard, High Efficacy, UGR19, CRI 90 and DALI create a wide choice for customers
- High efficacy of up to 111lm/W (600x600mm 4000K)
- Delivers up to 5900 lumen (1200x600, 4000K)
- Available in Warm White (3000K), Neutral White (4000K) and Cool White (6500K). Some of the temperature colour options could be available only upon request with a minimum quantity order. Please always check in advance with your sales contact
- Meets IP40 degree of protection from the front and IK03 degree of impact resistance
- Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute
- Loop-in-Loop-out (LILO) box added as an option for easy installation
- Safety cables (2 pieces) as additional parts in the package
- SDCM<3
- Long lifespan: 100.000 hours at 70% of the original output

Product information

Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
START Panel Non Dimmable										
CRI80 600x600										
0042821	START Panel UGR19 600x600 3200Lm 830 LILO	3000	36	3200	89	NON-DIM	25	595	595	220-240
0042822	START Panel UGR19 600x600 3200Lm 840 LILO	4000	36	3200	89	NON-DIM	25	595	595	220-240
0042823	START Panel UGR19 600x600 3200Lm 865 LILO	6500	36	3200	89	NON-DIM	25	595	595	220-240
0042824	START Panel UGR19 600x600 3400Lm 830 LILO	3000	36	3400	94	NON-DIM	25	595	595	220-240
0042825	START Panel UGR19 600x600 3600Lm 840 LILO	4000	36	3600	100	NON-DIM	25	595	595	220-240
0042826	START Panel UGR19 600x600 3600Lm 865 LILO	6500	36	3600	100	NON-DIM	25	595	595	220-240
0042827	START Panel UGR19 600x600 3800Lm 830 LILO	3000	36	3800	106	NON-DIM	25	595	595	220-240
0042828	START Panel UGR19 600x600 4000Lm 840 LILO	4000	36	4000	111	NON-DIM	25	595	595	220-240
0042829	START Panel UGR19 600x600 4000Lm 865 LILO	6500	36	4000	111	NON-DIM	25	595	595	220-240
0042830	START Panel UGR19 600x600 4600Lm 830 LILO	3000	43	4600	107	NON-DIM	25	595	595	220-240
0042831	START Panel UGR19 600x600 4800Lm 840 LILO	4000	43	4800	112	NON-DIM	25	595	595	220-240
0042832	START Panel UGR19 600x600 4800Lm 865 LILO	6500	43	4800	112	NON-DIM	25	595	595	220-240
CRI80 1200x300										
0042833	START Panel UGR19 1200x300 3200Lm 830 LILO	3000	36	3200	89	NON-DIM	25	1195	295	220-240
0042834	START Panel UGR19 1200x300 3400Lm 840 LILO	4000	36	3400	94	NON-DIM	25	1195	295	220-240
0042835	START Panel UGR19 1200x300 3400Lm 865 LILO	6500	36	3400	94	NON-DIM	25	1195	295	220-240
0042836	START Panel UGR19 1200x300 3600Lm 830 LILO	3000	36	3600	100	NON-DIM	25	1195	295	220-240
0042837	START Panel UGR19 1200x300 3800Lm 840 LILO	4000	36	3800	106	NON-DIM	25	1195	295	220-240
0042838	START Panel UGR19 1200x300 3800Lm 865 LILO	6500	36	3800	106	NON-DIM	25	1195	295	220-240
CRI80 1200x600										
0042201	START Panel UGR19 1200x600 5700Lm 830 LILO	3000	58	5700	98	NON-DIM	35	1195	595	220-240
0042202	START Panel UGR19 1200x600 5900Lm 840 LILO	4000	58	5900	102	NON-DIM	35	1195	595	220-240
0042203	START Panel UGR19 1200x600 5900Lm 865 LILO	6500	58	5900	102	NON-DIM	35	1195	595	220-240
CRI80 625x625										
0042842	START Panel UGR19 625x625 3200Lm 830 LILO	3000	36	3200	89	NON-DIM	25	620	620	220-240
0042843	START Panel UGR19 625x625 3200Lm 840 LILO	4000	36	3200	89	NON-DIM	25	620	620	220-240
0042844	START Panel UGR19 625x625 3200Lm 865 LILO	6500	36	3200	89	NON-DIM	25	620	620	220-240
0042845	START Panel UGR19 625x625 3800Lm 830 LILO	3000	36	3800	106	NON-DIM	25	620	620	220-240
0042846	START Panel UGR19 625x625 4000Lm 840 LILO	4000	36	4000	111	NON-DIM	25	620	620	220-240
0042847	START Panel UGR19 625x625 4000Lm 865 LILO	6500	36	4000	111	NON-DIM	25	620	620	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order

START Panel UGR19




Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
CRI80 600x600 DALI										
0042848	START Panel UGR19 600x600 DALI 3400Lm 830	3000	36	3400	94	DALI	25	595	595	220-240
0042849	START Panel UGR19 600x600 DALI 3600Lm 840	4000	36	3600	100	DALI	25	595	595	220-240
0042850	START Panel UGR19 600x600 DALI 3600Lm 865	6500	36	3600	100	DALI	25	595	595	220-240
0042851	START Panel UGR19 600x600 DALI 3800Lm 830	3000	36	3800	106	DALI	25	595	595	220-240
0042852	START Panel UGR19 600x600 DALI 4000Lm 840	4000	36	4000	111	DALI	25	595	595	220-240
0042853	START Panel UGR19 600x600 DALI 4000Lm 865	6500	36	4000	111	DALI	25	595	595	220-240
0042854	START Panel UGR19 600x600 DALI 4600Lm 830	3000	43	4600	107	DALI	25	595	595	220-240
0042855	START Panel UGR19 600x600 DALI 4800Lm 840	4000	43	4800	112	DALI	25	595	595	220-240
0042856	START Panel UGR19 600x600 DALI 4800Lm 865	6500	43	4800	112	DALI	25	595	595	220-240
CRI80 1200x300 DALI										
0042857	START Panel UGR19 1200x300 DALI 3200Lm 830	3000	36	3200	89	DALI	25	1195	295	220-240
0042858	START Panel UGR19 1200x300 DALI 3400Lm 840	4000	36	3400	94	DALI	25	1195	295	220-240
0042859	START Panel UGR19 1200x300 DALI 3400Lm 865	6500	36	3400	94	DALI	25	1195	295	220-240
0042860	START Panel UGR19 1200x300 DALI 3600Lm 830	3000	36	3600	100	DALI	25	1195	295	220-240
0042861	START Panel UGR19 1200x300 DALI 3800Lm 840	4000	36	3800	106	DALI	25	1195	295	220-240
0042862	START Panel UGR19 1200x300 DALI 3800Lm 865	6500	36	3800	106	DALI	25	1195	295	220-240
CRI80 625x625 DALI										
0042866	START Panel UGR19 625x625 DALI 3800Lm 830	3000	36	3800	106	DALI	25	620	620	220-240
0042867	START Panel UGR19 625x625 DALI 4000Lm 840	4000	36	4000	111	DALI	25	620	620	220-240
0042868	START Panel UGR19 625x625 DALI 4000Lm 865	6500	36	4000	111	DALI	25	620	620	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order



START Panel UGR19 SylSmart enabled



Features


- The range includes 600x600mm, 625x625mm and 1200x300mm modules to meet the most common installation needs
- Microprismatic diffuser for low glare and low UGR 19 value
- SylSmart Connected (SSA) is a wireless, intelligent lighting control system offering a sustainable solution for office applications achieving high energy efficiency without compromising the comfort of occupants
- SylSmart Standalone (SSC) is a wireless, plug and play lighting control solution which is ideal for any applications where easy installations, low upfront cost and low maintenance are essential
- Slim size 35mm maximum (with driver 65mm) for SSA, 25mm maximum (with driver 55mm) for SSC
- High efficacy of up to 112lm/W (600x600mm @ 4000K)
- Delivers up to 4800lm (600x600, 4000K)
- Available in Warm White (3000K), Neutral White (4000K) and Cool White (6500K). Some of the temperature colour options could be available only upon request with a minimum quantity order. Please always check in advance with your sales contact
- Meets IP40 degree of protection from the front and IK03 degree of impact resistance
- Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute
- Loop-in-Loop-out (LILO) box added as an option for easy installation
- Safety cables (2 pieces) as additional parts in the package
- SDCM<3
- Long lifespan: 100.000 hours at 70% of the original output

Product information

Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
START Panel SylSmart Connected										
CRI80 600x600										
0042388	START Panel UGR19 600x600 3800Lm 830 SSA02	3000	36	3800	106	SylSmart SSA	35	595	595	220-240
0042389	START Panel UGR19 600x600 4000Lm 840 SSA02	4000	36	4000	111	SylSmart SSA	35	595	595	220-240
0042390	START Panel UGR19 600x600 4600Lm 830 SSA02	3000	43	4600	107	SylSmart SSA	35	595	595	220-240
0042391	START Panel UGR19 600x600 4800Lm 840 SSA02	4000	43	4800	112	SylSmart SSA	35	595	595	220-240
CRI80 1200x300										
0042394	START Panel UGR19 1200x300 3600Lm 830 SSA02	3000	36	3600	100	SylSmart SSA	35	1195	295	220-240
0042395	START Panel UGR19 1200x300 3800Lm 840 SSA02	4000	36	3800	106	SylSmart SSA	35	1195	295	220-240
CRI80 625x625										
0042392	START Panel UGR19 625x625 3800Lm 830 SSA02	3000	36	3800	106	SylSmart SSA	35	620	620	220-240
0042393	START Panel UGR19 625x625 4000Lm 840 SSA02	4000	36	4000	111	SylSmart SSA	35	620	620	220-240
START Panel SylSmart Standalone										
CRI80 600x600										
0042893	START Panel UGR19 600x600 3800Lm 830 SSC	3000	36	3800	106	SylSmart SSC	25	595	595	220-240
0042894	START Panel UGR19 600x600 4000Lm 840 SSC	4000	36	4000	111	SylSmart SSC	25	595	595	220-240
0042895	START Panel UGR19 600x600 4000Lm 865 SSC	6500	36	4000	111	SylSmart SSC	25	595	595	220-240
0042896	START Panel UGR19 600x600 4600Lm 830 SSC	3000	43	4600	107	SylSmart SSC	25	595	595	220-240
0042897	START Panel UGR19 600x600 4800Lm 840 SSC	4000	43	4800	112	SylSmart SSC	25	595	595	220-240
0042898	START Panel UGR19 600x600 4800Lm 865 SSC	6500	43	4800	112	SylSmart SSC	25	595	595	220-240
CRI80 1200x300										
0042899	START Panel UGR19 1200x300 3600Lm 830 SSC	3000	36	3600	100	SylSmart SSC	25	1195	295	220-240
0042900	START Panel UGR19 1200x300 3800Lm 840 SSC	4000	36	3800	106	SylSmart SSC	25	1195	295	220-240
0042901	START Panel UGR19 1200x300 3800Lm 865 SSC	6500	36	3800	106	SylSmart SSC	25	1195	295	220-240
CRI80 625x625										
0042902	START Panel UGR19 625x625 3800Lm 830 SSC	3000	36	3800	106	SylSmart SSC	25	620	620	220-240
0042903	START Panel UGR19 625x625 4000Lm 840 SSC	4000	36	4000	111	SylSmart SSC	25	620	620	220-240
0042904	START Panel UGR19 625x625 4000Lm 865 SSC	6500	36	4000	111	SylSmart SSC	25	620	620	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order

START Panel UGR19 IP44



Features

- The range includes 600x600mm and 1200x300mm modules to meet the most common installation needs
- Microprismatic diffuser for low glare and low UGR 19 value
- Slim size 35mm maximum (with driver 65mm)
- Recessed integrated LED IP44 degree (from the front) panel with anti-glare UGR19 prismatic diffuser
- High efficacy of up to 126lm/W (600x600mm HE version @ 4000K)
- Delivers up to 4300lm (600x600mm, 4000K)
- Available in Warm White (3000K), Neutral White (4000K). Some of the temperature colour options could be available only upon request with a minimum quantity order. Please always check in advance with your sales contact
- Meets IP44 degree of protection from the front and IK03 degree of impact resistance
- Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute
- Tp(a) rated diffuser on selected items that self-extinguishes within 5 sec when a flame has been removed
- Loop-in-Loop-out (LILO) box added as an option for easy installation
- Safety cables (2 pieces) as additional parts in the package
- SDCM<3
- Long lifespan: 100.000 hours at 70% of the original output

Product information

Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
START Panel IP44										
CRI80 600x600 NON-DIM										
0042630	ST Panel UGR19 600x600 HE IP44 4100 830 LILO	3000	34	4100	121	NON-DIM	35	595	595	220-240
0042631	ST Panel UGR19 600x600 HE IP44 4300 840 LILO	4000	34	4300	126	NON-DIM	35	595	595	220-240
0042632	ST Panel UGR19 600x600 HE IP44 4100 830 TPA LILO	3000	34	4100	121	NON-DIM	35	595	595	220-240
0042633	ST Panel UGR19 600x600 HE IP44 4300 840 TPA LILO	4000	34	4300	126	NON-DIM	35	595	595	220-240
CRI80 1200x300 NON-DIM										
0042634	ST Panel UGR19 1200x300 HE IP44 3900 830 LILO	3000	34	3900	115	NON-DIM	35	1195	295	220-240
0042635	ST Panel UGR19 1200x300 HE IP44 4100 840 LILO	4000	34	4100	121	NON-DIM	35	1195	295	220-240
0042636	ST Panel UGR19 1200x300 HE IP44 3900 830 TPA LILO	3000	34	3900	115	NON-DIM	35	1195	295	220-240
0042637	ST Panel UGR19 1200x300 HE IP44 4100 840 TPA LILO	4000	34	4100	121	NON-DIM	35	1195	295	220-240
CRI80 625x625 NON-DIM										
0042674	ST Panel UGR19 625x625 HE IP44 4100 830 LILO	3000	34	4100	121	N/A	35	620	620	220-240
0042675	ST Panel UGR19 625x625 HE IP44 4300 840 LILO	4000	34	4300	126	N/A	35	620	620	220-240
CRI80 600x600 DALI										
0042638	ST Panel UGR19 600x600 HE IP44 DALI 4100 830 TPA	3000	34	4100	121	DALI	35	595	595	220-240
0042639	ST Panel UGR19 600x600 HE IP44 DALI 4300 840 TPA	4000	34	4300	126	DALI	35	595	595	220-240
CRI80 1200x300 DALI										
0042640	ST Panel UGR19 1200x300 HE IP44 DALI 3900 830 TPA	3000	34	3900	115	DALI	35	1195	295	220-240
0042641	ST Panel UGR19 1200x300 HE IP44 DALI 4100 840 TPA	4000	34	4100	121	DALI	35	1195	295	220-240
CRI80 625x625 DALI										
0042676	ST Panel UGR19 625x625 HE IP44 DALI 4100 830	3000	34	4100	121	DALI	35	620	620	220-240
0042677	ST Panel UGR19 625x625 HE IP44 DALI 4300 840	4000	34	4300	126	DALI	35	620	620	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order

START Panel UGR19 IP65



Features

- Meets IP65 degree of protection (both front and back - able to protect against water jets) and IK03 degree of impact resistance
- The range includes 600x600mm, 625x625mm and 1200x300mm modules to meet the most common installation needs
- Prismatic diffuser for low glare and low UGR 19 value
- CRI90 version for true colours
- Polystyrene (PS) diffuser material can be cleaned without issues with H2O2 (Hydrogen Peroxide) which is usually used for decontamination in hospitals and labs
- Tested against Chlorinated Alkali liquid cleaner
- Slim size of 34mm
- DALI dimmable version to adjust the light to the right level that is needed for a specific task
- Available in Neutral White (4000K)
- High efficacy up to 122lm/W (600x600 / 625x625 4000K CRI80)
- Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute
- Loop-in-Loop-out (LILO) box added as an option for easy installation
- Safety cables (2 pieces) as additional parts in the package
- SDCM <3
- Long lifespan: 100.000 hours at 70% of the original output

Product information

Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
START Panel IP65										
CRI90 600x600										
0042692	START Panel IP65 UGR19 600x600 4400lm 940 WH	4000	44	4400	100	NON-DIM	34	595	595	220-240
0042694	START Panel IP65 UGR19 600x600 4400lm 940 DALI WH	4000	45	4400	98	DALI	34	595	595	220-240
CRI80 600x600										
0042691	START Panel IP65 UGR19 600x600 4400lm 840 WH	4000	36	4400	122	NON-DIM	34	595	595	220-240
0042693	START Panel IP65 UGR19 600x600 4400lm 840 DALI WH	4000	37	4400	119	DALI	34	595	595	220-240
CRI90 1200x300										
0042696	START Panel IP65 UGR19 1200x300 4300lm 940 WH	4000	44	4300	98	NON-DIM	34	1195	295	220-240
0042698	START Panel IP65 UGR19 1200x300 4300lm 940 DALI WH	4000	45	4300	96	DALI	34	1195	295	220-240
CRI80 1200x300										
0042695	START Panel IP65 UGR19 1200x300 4300lm 840 WH	4000	36	4300	119	NON-DIM	34	1195	295	220-240
0042697	START Panel IP65 UGR19 1200x300 4300lm 840 DALI WH	4000	37	4300	116	DALI	34	1195	295	220-240
CRI90 625x625										
0042700	START Panel IP65 UGR19 625x625 4400lm 940 WH	4000	44	4400	100	NON-DIM	34	620	620	220-240
0042702	START Panel IP65 UGR19 625x625 4400lm 940 DALI WH	4000	45	4400	98	DALI	34	620	620	220-240
CRI80 625x625										
0042699	START Panel IP65 UGR19 625x625 4400lm 840 WH	4000	36	4400	122	NON-DIM	34	620	620	220-240
0042701	START Panel IP65 UGR19 625x625 4400lm 840 DALI WH	4000	37	4400	119	DALI	34	620	620	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order

Accessories

Code	Description
0047472	IP68 LILO Junction Box 3P 5P



START Panel UGR19 IP65



Additional Images



600x600/625x625




1200x300




IP68 LILO Junction Box 3P 5P


Photometric data

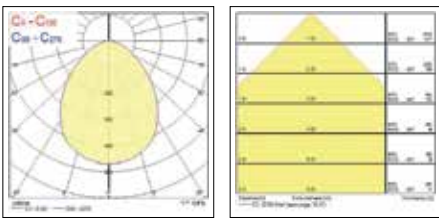


Dimensions (mm)




600x600

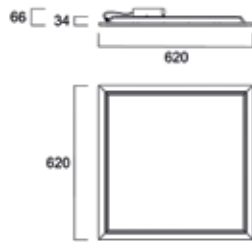


625x625




600x600 DALI

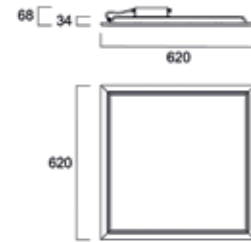

625x625 DALI

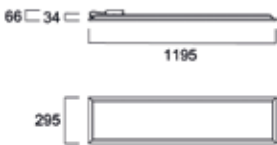


1200x300

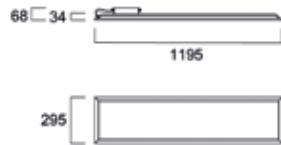

1200x300 DALI

START Panel



Features


- The range includes 600x600mm, 625x625mm and 1200x300mm modules to meet the most common installation needs
- Opal diffuser to achieve a wide beam and provides an even and diffused lighting
- Slim size 25mm maximum (with driver 65mm)
- Available in Warm White (3000K) and Neutral White (4000K)
- High efficacy of up to 126lm/W (600x600mm HE version @ 4000K)
- Delivers up to 4300lm (600x600mm, 4000K)
- Available in Warm White (3000K), Neutral White (4000K) and Cool White (6500K). Some of the temperature colour options could be available only upon request with a minimum quantity order. Please always check in advance with your sales contact
- Meets IP40 degree of protection from the front and IK03 degree of impact resistance
- Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute
- Loop-in-Loop-out (LILO) box added as an option for easy installation
- Safety cables (2 pieces) as additional parts in the package
- SDCM<3
- Long lifespan: 100.000 hours at 70% of the original output

Product information

Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
START Panel										
CRI80 600x600 NON-DIM										
0042869	START Panel 600x600 3800Lm 830 LILO	3000	36	3800	106	NON-DIM	25	595	595	220-240
0042870	START Panel 600x600 4000Lm 840 LILO	4000	36	4000	111	NON-DIM	25	595	595	220-240
0042871	START Panel 600x600 4000Lm 865 LILO	6500	36	4000	111	NON-DIM	25	595	595	220-240
0042872	START Panel 600x600 HE 4100Lm 830 LILO	3000	34	4100	121	NON-DIM	25	595	595	220-240
0042873	START Panel 600x600 HE 4300Lm 840 LILO	4000	34	4300	126	NON-DIM	25	595	595	220-240
0042874	START Panel 600x600 HE 4300Lm 865 LILO	6500	34	4300	126	NON-DIM	25	595	595	220-240
CRI80 1200x300 NON-DIM										
0042878	START Panel 1200x300 HE 3900Lm 830 LILO	3000	34	3900	115	NON-DIM	25	1195	295	220-240
0042879	START Panel 1200x300 HE 4100Lm 840 LILO	4000	34	4100	121	NON-DIM	25	1195	295	220-240
0042880	START Panel 1200x300 HE 4100Lm 865 LILO	6500	34	4100	121	NON-DIM	25	1195	295	220-240
CRI80 625x625 NON-DIM										
0042875	START Panel 625x625 HE 4100Lm 830 LILO	3000	34	4100	121	NON-DIM	25	620	620	220-240
0042876	START Panel 625x625 HE 4300Lm 840 LILO	4000	34	4300	126	NON-DIM	25	620	620	220-240
0042877	START Panel 625x625 HE 4300Lm 865 LILO	6500	34	4300	126	NON-DIM	25	620	620	220-240
CRI80 600x600 DALI										
0042881	START Panel 600x600 DALI 3800Lm 830	3000	36	3800	106	DALI	25	595	595	220-240
0042882	START Panel 600x600 DALI 4000Lm 840	4000	36	4000	111	DALI	25	595	595	220-240
0042883	START Panel 600x600 DALI 4000Lm 865	6500	36	4000	111	DALI	25	595	595	220-240
0042884	START Panel 600x600 HE DALI 4100Lm 830	3000	34	4100	121	DALI	25	595	595	220-240
0042885	START Panel 600x600 HE DALI 4300Lm 840	4000	34	4300	126	DALI	25	595	595	220-240
0042886	START Panel 600x600 HE DALI 4300Lm 865	6500	34	4300	126	DALI	25	595	595	220-240
CRI80 1200x300 DALI										
0042890	START Panel 1200x300HE DALI 3900Lm 830	3000	34	3900	115	DALI	25	1195	295	220-240
0042891	START Panel 1200x300HE DALI 4100Lm 840	4000	34	4100	121	DALI	25	1195	295	220-240
0042892	START Panel 1200x300HE DALI 4100Lm 865	6500	34	4100	121	DALI	25	1195	295	220-240
CRI80 625x625 DALI										
0042887	START Panel 625x625 HE DALI 4100Lm 830	3000	34	4100	121	DALI	25	620	620	220-240
0042888	START Panel 625x625 HE DALI 4300Lm 840	4000	34	4300	126	DALI	25	620	620	220-240
0042889	START Panel 625x625 HE DALI 4300Lm 865	6500	34	4300	126	DALI	25	620	620	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order

START Panel



Features

- An economic version with efficacy of up to 89lm/W
- Opal diffuser to achieve a wide beam and provides an even and diffused lighting
- Slim size with width of 25mm (with driver 55mm)
- Delivers up to 3200 lumen
- Loop-in-Loop-out (LILO) box added as an option for easy installation
- Meets IP40 degree of protection from the front and IK03 degree of impact resistance
- Tp(b) rated diffuser that may not burn at a speed of more than 50mm per minute
- 600 x 600mm and 1200 x 300mm modules to meet most common installation needs
- Available in Warm White (3000K), Neutral White (4000K) and Cool White (6500K). Some of the temperature colour options could be available only upon request with a minimum quantity order. Please always check in advance with your sales contact
- Even coverage of light throughout the face - no dark or hot spots
- Long lifespan: 100.000 hours at 70% of the original output


Product information

Code	Description	Correlated Colour Temperature (K)	Total power consumption (W)	Fixture lumen (lm)	Luminaire efficacy (lm/W)	Dimming Method	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)	Mains voltage (V)
START Panel Non Dimmable										
CRI80 600x600										
0042807	START Panel 3YW 600x600 3200Lm 830 LILO	3000	36	3200	89	NON-DIM	25	595	595	220-240
0042808	START Panel 3YW 600x600 3200Lm 840 LILO	4000	36	3200	89	NON-DIM	25	595	595	220-240
0042809	START Panel 3YW 600x600 3200Lm 865 LILO	6500	36	3200	89	NON-DIM	25	595	595	220-240
CRI80 1200x300										
0042810	START Panel 3YW 1200x300 3200Lm 830 LILO	3000	36	3200	89	NON-DIM	25	1195	295	220-240
0042811	START Panel 3YW 1200x300 3200Lm 840 LILO	4000	36	3200	89	NON-DIM	25	1195	295	220-240
0042812	START Panel 3YW 1200x300 3200Lm 865 LILO	6500	36	3200	89	NON-DIM	25	1195	295	220-240
CRI80 625x625										
0042813	START Panel 3YW 625x625 3200Lm 830 LILO	3000	36	3200	89	NON-DIM	25	625	625	220-240
0042814	START Panel 3YW 625x625 3200Lm 840 LILO	4000	36	3200	89	NON-DIM	25	625	625	220-240
0042815	START Panel 3YW 625x625 3200Lm 865 LILO	6500	36	3200	89	NON-DIM	25	625	625	220-240

Pls always check item availability with your sales contact. Some of the items could be available only upon request with a minimum quantity order




START Panel



Additional Images



600x600/625x625




1200x300




1200x600

Photometric data





UGR19




UGR22




Dimension, 35mm height versions (mm)

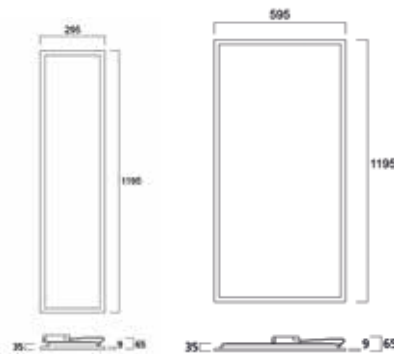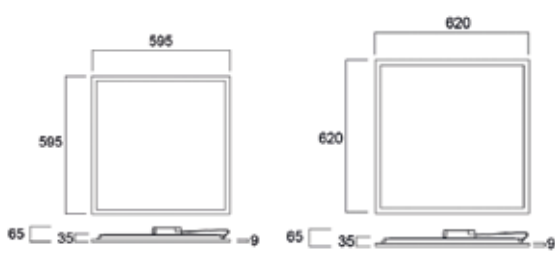

Dimension, 25mm height versions (mm)

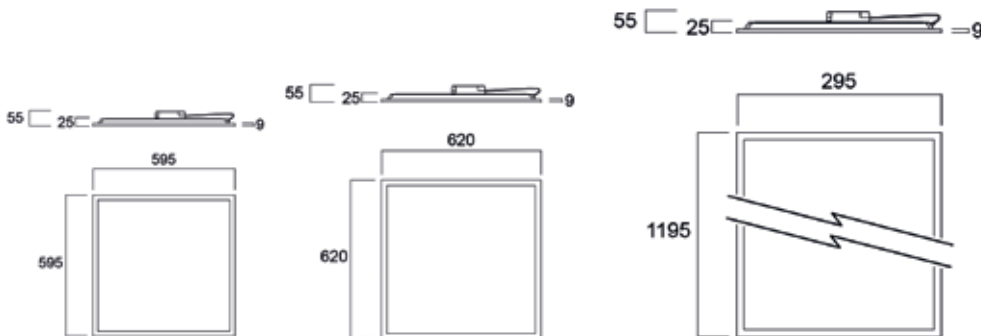

START Panel accessories



Accessories

Code	Description
0047046	START eco Panel Mounting Clips 4 pcs
0047416	Plasterboard Ceiling Frame 600x600
0047418	Plasterboard Ceiling Frame 1200x300
0047517	START Flat Panel LED Suspension Kit
0047197	Surface Mounting Kit 600x600x70mm
0047199	Surface Mounting Kit 625x625x70mm
0047198	Surface Mounting Kit 1200x300x70mm
0047269	Surface Mounting Kit 1200x600x70mm
0046600	Emergency Pack Standard 6V-55V
0046601	Emergency Pack DALI 6V-55V

Please check accessory compatibility on the website



0047046



0047416



0047418



0047517



0047197



0047199



0047198



0047269



0046600/0046601



SYLVANIA



CE UK
CA

in f  

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. December 2022

sylvania-lighting.com

A Feilo Sylvania Company