

apleton
Papagiannopoulos Bros

imole 30





LUMINAIRE DESCRIPTION

Imole is a custom-made luminaire suitable for installation in cast concrete, in insulation panels, in plasterboard and in variety of construction material.

It is composed of two elements, the housing (galvanize or inox) and the kit (made of die cast aluminum) which remains completely hidden. It can be produced in variety of lengths and heights. It can be painted in any color and its front finish can be covered in any material (stone, ceramic, etc.).

The opening of the light slit depends on the wattage of the LED, the type of ballast and the thickness of the material chosen to cover the front finish.

LUMINAIRE IMAGE

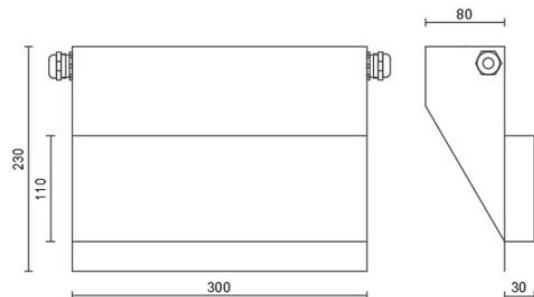

LUMINAIRE INFORMATION

Product Name: [imole 30](#)
Code: Custom
Environment Application: outdoor
Driver: external / internal

LUMINAIRE DETAILS

APPLICATION DETAILS

Fitting Type: wall recessed	wall recessed
Housing Color: upon request	RAL:1015 – light ivory
Housing Material: galvanize or inox	inox
Dimensions: upon request	W 300mm / H 230mm
Voltage: 230V	230V
Wattage: upon request	10W
IP Rating: 65 or more	65
Accessories: kit with mounted driver	kit with mounted driver

LIGHT SOURCE

APPLICATION DETAILS

Type: LED	LED
Wattage: upon request	10W
Luminous Flux: upon request	780 lm
Color Temperature: upon request	2700K

DRIVER DETAILS

APPLICATION DETAILS

Driver Voltage Input: 230V	230V
Driver Voltage Output: upon request	24V
Driver Wattage: upon request	10W
Dimming Protocol: upon request	on-off